

# Oil Cable Test Terminations

## Testing Applications

Used for type and production testing of solid dielectric insulated high voltage cables from 10 kV to 100 kV

- **Rugged** design
- **Easy cable** preparation
- **Isolating** oil filled
- **Economical** choice for **cable testing**

## Design Features

- Clear acrylic tube with self-centering plug-in socket for quick and easy cable insertion
- Cable guide with diameter of 1 3/8" (34.9 mm) accepts a wide range of center conductors
- Oil capacity approximately 4 gallons (15 L) per termination
- Over-flow container to catch oil drip
- Spigot drain for easy, spill-free oil change
- Short cable strip length
- Less than 1 pC @ 100 kV
- 120 kV proof test voltage
- Swivel casters for easy movement



**Cable Guide**




**Shield Electrodes**



**Cable Adaptor**



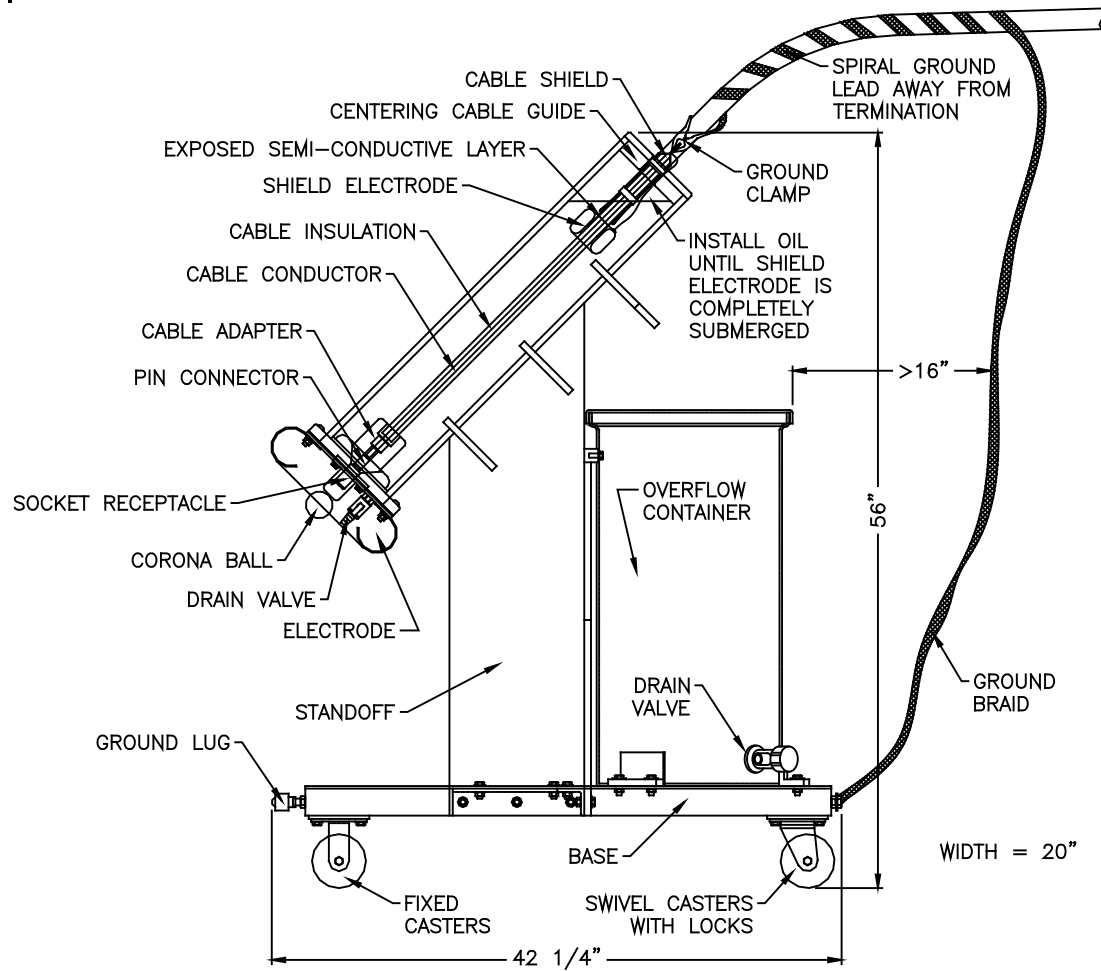

## Dimensions and Weight

42 ¼" (1073 mm) L x 20" (508 mm) W x 56" (1422 mm) H

150 lbs (68 kg) (empty)



**PHENIX**  
TECHNOLOGIES

### WORLD HEADQUARTERS

#### Phenix Technologies, Inc.

75 Speicher Drive  
Accident, MD 21520 USA  
Ph: +1.301.746.8118  
Fx: +1.301.895.5570  
Info@phenixtech.com

### BRANCH OFFICES

#### Phenix Systems AG

Riehenstrasse 62A, 4058 Basel, Switzerland  
Ph: +41.61.383.2770, Fx: +41.61.383.2771, Info@phenixsystems.com

#### Phenix Asia

Zhong Cheng Rd, Sec 1, No 177, 2F, Taipei 11148 Taiwan  
Ph: +886.2.2835.9738, Fx: +886.2.2835.9879, Info@phenixasia.com

ISO  
9001:2008  
Compliant

