



Oil Cable Test Terminations

TESTING APPLICATIONS

Used for type and production testing of solid dielectric insulated high voltage cables from 10 kV to 100 kV

DESIGN FEATURES

- Clear acrylic tube with self-centering plug-in socket for quick and easy cable insertion
- Cable guide with diameter of 1 3/8" (34.9 mm) accepts a wide range of center conductors
- Oil capacity approximately 4 gallons (15 L) per termination
- Over-flow container to catch oil drip
- Spigot drain for easy, spill-free oil change
- Short cable strip length
- Less than 1 pC @ 100 kV
- 120 kV proof test voltage
- Swivel casters for easy movement

- Rugged design
- Easy cable preparation
- Isolating oil filled
- Economical choice for cable testing




Cable Guide




Shield Electrodes



Cable Adaptor



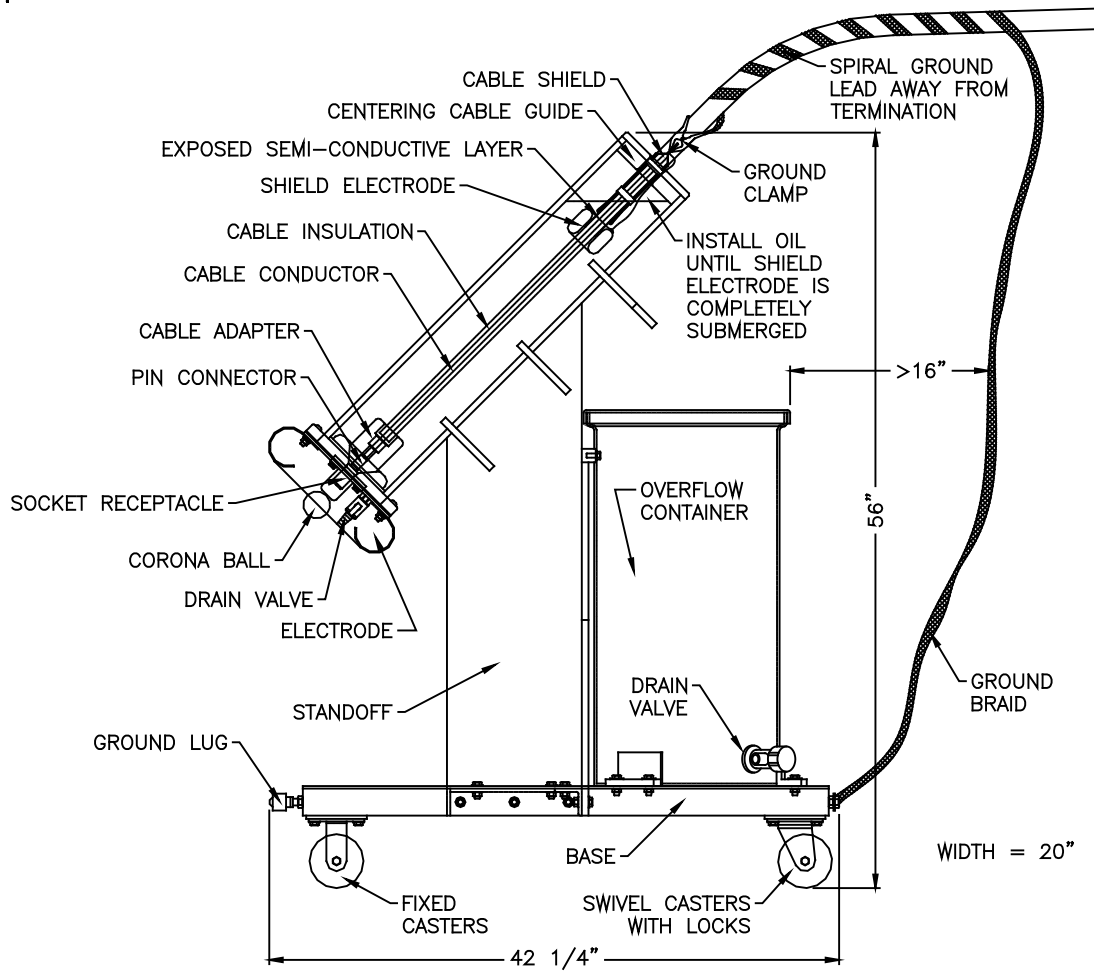

DIMENSIONS AND WEIGHT

42 1/4" (1073 mm) L x 20" (508 mm) W x 56" (1422 mm) H

150 lbs (68 kg) (empty)

High Voltage • High Current • High Power Test Systems and Components



www.phenixtech.com

World Headquarters
Phenix Technologies, Inc.
 75 Speicher Drive
 Accident, MD 21520 USA
Ph: +1.301.746.8118
Fx: +1.301.895.5570
Info@phenixtech.com

Branch Offices

Phenix Systems AG
 Riehenstrasse 62A, 4058 Basel, Switzerland
Ph: +41.61.3283.2770 • Fx: +41.61.383.2771
Info@phenixsystems.com

Phenix Asia
 Zhong Cheng Rd, Sec 1, No 177, 2F, Taipei 11148 Taiwan
Ph: +886.2.2835.9738 • Fx: +886.2.2835.9879
Info@phenixasia.com

