



# Standard Capacitors


## TESTING APPLICATIONS

Phenix Technologies' standard compressed gas capacitors (SC series) are designed to be high precision and stable high voltage reference capacitors with a very low loss factor. With these characteristics, the SC series capacitors are ideally suited for capacitance and tangent delta measurements, transformer ratio testing, and precision AC voltage measurements.

## DESIGN FEATURES

The SC series capacitors are comprised of a high voltage electrode, a measurement low voltage electrode, a shielding electrode, and a ground electrode arranged coaxially in an insulating fiberglass cylinder. The cylinder is filled with SF<sub>6</sub> gas at approximately 4 bar (58 psi). A gas filling valve, gas pressure gage, and electrical connection are located at the base of the cylinder.

In order to minimize proximity effects, the measurement electrode is surrounded by the shielding electrode. The physical arrangement of the electrodes effectively reduces the effect of stray capacitances to zero. The SC series capacitors are designed for corona free operation. The capacitor is equipped with Lemo and Dilo style connectors and gas fittings.



## OPTION


As an option, the capacitor can be equipped with an additional auxiliary measurement electrode; this electrode can be used in conjunction with the low arm capacitor as a precision voltage divider.

## TRANSPORTATION

Each capacitor is shipped with an internal gas pressure of 1 bar (14.5 psi) and a fill kit for on-site pressurization.

## SC100-100 SPECIFICATIONS

Accuracy of the C12 measured value.....	±0.03%
Tangent Delta of C12 .....	<1x10-5
Temperature Range .....	-10 to 40 degrees C
Maximum Relative Humidity at rated voltage .....	90%
Rated Voltage.....	100 kV RMS
Measurement Capacitance of C12.....	100 pF
Optional Auxiliary Capacitance C13.....	15 pF
Working Pressure .....	4 bar (58 psi)
Dimensions .....	26 ¼" L x 26 ¼" W x 53 ¼" H (667 mm L x 667 mm W x 1353 mm H)
Weight .....	160 lbs (73 kgs)

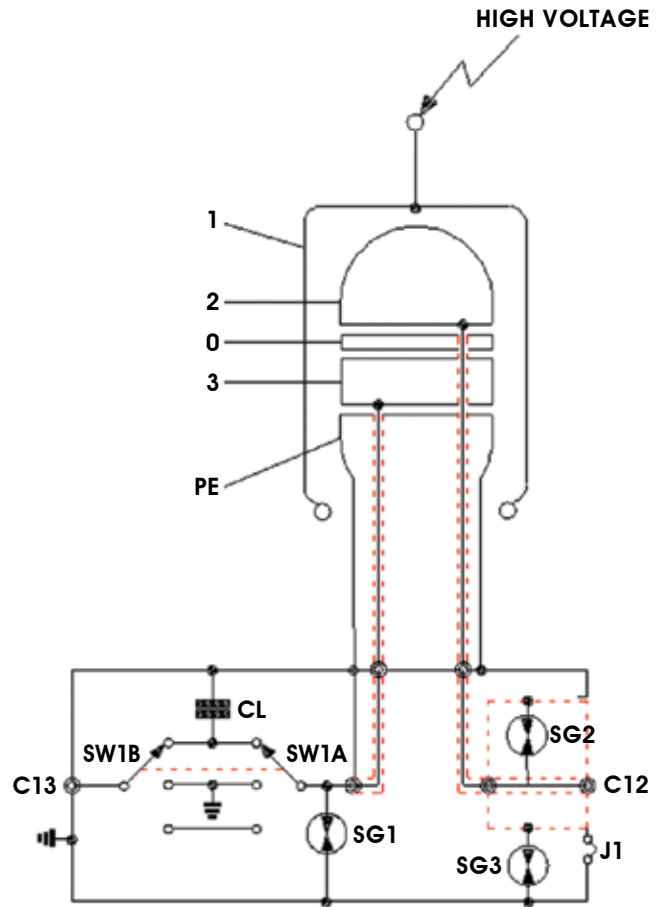

- 1 High Voltage Electrode
- 2 Measurement Electrode
- 0 Shield Electrode
- 3 Auxiliary Electrode (optional)
- PE Ground
- C12 Connection for capacitance and tangent delta measurement
- C13 Connection for voltage measurement (optional)
- CL Low Arm Capacitor (optional)
- SW1 Low Arm Selector Switch (optional)
- J1 Jumper to ground (removable)

High Voltage • High Current • High Power Test Systems and Components

ISO 9001  
CERTIFIED



www.phenixtech.com

**World Headquarters**  
**Phenix Technologies, Inc.**  
 75 Speicher Drive  
 Accident, MD 21520 USA  
**Ph: +1.301.746.8118**  
**Fx: +1.301.895.5570**  
**Info@phenixtech.com**

### Branch Offices

**Phenix Systems AG**  
 Riehenstrasse 64, 4058 Basel, Switzerland  
**Ph: +41.61.383.2770 • Fx: +41.61.383.2771**  
**Info@phenixsystems.com**

**Phenix Asia**  
 Zhong Cheng Rd, Sec 1, No 177, 2F, Taipei 11148 Taiwan  
**Ph: +886.2.2835.9738 • Fx: +886.2.2835.9879**  
**Info@phenixasia.com**

